


# Technical data sheet

## Height-compensation kit ASH 350-4 320

Item number: 7410140



Height-compensation kit for UZD350-4 underfloor boxes with a construction height of 240 to 320 mm for construction-side raising of the UZD.



|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanised |

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 7410140                 |
| Type                               | ASH 350-4 320           |
| Description 1                      | Height compensation set |
| Description 2                      | for UZD 350-4           |
| Manufacturer                       | OBO                     |
| Dimension                          | 453x183x46              |
| Material                           | Steel                   |
| Surface                            | Strip galvanised        |
| Surface standard                   | DIN EN 10346            |
| Smallest sales unit                | 1                       |
| Unit of quantity                   | Packaging unit          |
| Weight                             | 216 kg                  |
| Weight unit                        | kg/100 PUs              |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,688 kg CO2e / 4 Piece |



# Technical data sheet

## Height-compensation kit ASH 350-4 320

Item number: 7410140



### Dimensions

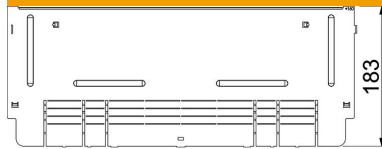

|             |         |
|-------------|---------|
| Length      | 453 mm  |
| Width       | 183 mm  |
| Dimension A | 453 mm  |
| Dimension B | 183 mm  |
| Dimension I | 47.5 mm |

### Technical data

|                                                   |        |
|---------------------------------------------------|--------|
| Version for                                       | Square |
| Floor plate                                       | no     |
| Lowerable to be flush-floor                       | no     |
| Seal installation option                          | no     |
| Installation opening for on-floor tank            | no     |
| Decouplable                                       | no     |
| Screed height, max.                               | 320 mm |
| Screed height, min.                               | 240 mm |
| For pipe connection                               | no     |
| Suitable for raised floor installation            | no     |
| Suitable for screed-flush closed underfloor ducts | no     |
| Suitable for screed-covered underfloor ducts      | yes    |
| Suitable for cavity floor installation            | no     |
| Suitable for underfloor ducts                     | no     |
| Trunking width, max.                              | 350 mm |
| Trunking width, min.                              | 190 mm |
| Minimum screed height                             | 240    |
| Height-adjustment range, max.                     | 320 mm |
| Height-adjustment range, min.                     | 240 mm |