

# Technical data sheet

## Spacer clip 733 G

Item number: 1362772



Spacer clip for the installation of pipes and cables on walls, ceilings and floors.  
With self-locking cover. Fastening via slot.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E 30 to E 90.



**St** Steel

**G** Electrogalvanized

### Master data

|                                   |                            |
|-----------------------------------|----------------------------|
| Item number                       | 1362772                    |
| Description 1                     | Distance saddle            |
| Description 2                     | with slot                  |
| Manufacturer                      | OBO                        |
| Dimension                         | 25-30mm                    |
| Material                          | Steel                      |
| Surface                           | Electrogalvanized          |
| Surface standard                  | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit               | 20                         |
| Unit of quantity                  | Piece                      |
| Weight                            | 3.401 kg                   |
| Weight unit                       | kg/100 pc.                 |
| CO Footprint (GWP) Cradle-to-Gate | 0,1011 kg COe / 1 Piece    |


# Technical data sheet

## Spacer clip 733 G

Item number: 1362772



### Dimensions

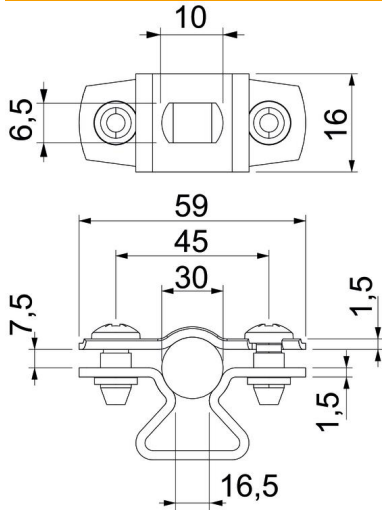

|                   |         |
|-------------------|---------|
| Dimension A       | 59 mm   |
| Dimension B       | 45 mm   |
| Dimension b       | 16 mm   |
| Dimension D       | 30 mm   |
| Dimension d max.  | 30 mm   |
| Dimension d min.  | 25 mm   |
| Dimension L       | 10 mm   |
| Dimension s       | 16.5 mm |
| Dimension t1 (mm) | 1.5     |
| Dimension t2 (mm) | 1.5     |
| Dimension x       | 7.5 mm  |

### Technical data

|                                  |            |
|----------------------------------|------------|
| Distance to the wall             | yes        |
| Number of cables/pipes           | 1          |
| Version for                      | Closed     |
| Fastening type                   | Screw hole |
| For diameter                     | 25 - 30    |
| Suitable in fire protection area | yes        |
| Halogen-free                     | yes        |
| Plastic-covered                  | no         |
| Material thickness               | 1.5 mm     |
| Clamping range D, max.           | 30 mm      |
| Clamping range D, min.           | 25 mm      |
| UV-resistant                     | yes        |