

# Technical data sheet

End piece, for device installation trunking Rapid 80 type 70170

Item number: 6274770



End piece for closing the device installation trunking.



**PVC** Polyvinylchloride

| Master data                        |                         |
|------------------------------------|-------------------------|
| Item number                        | 6274770                 |
| Type                               | GK-E70170RW             |
| Description 1                      | End piece               |
| Manufacturer                       | OBO                     |
| Dimension                          | 70x170mm                |
| Colour                             | Pure white; RAL 9010    |
| Material                           | Polyvinylchloride       |
| Smallest sales unit                | 1                       |
| Unit of quantity                   | Piece                   |
| Weight                             | 6.84 kg                 |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2633 kg COe / 1 Piece |


# Technical data sheet

End piece, for device installation trunking Rapid 80 type  
70170

Item number: 6274770



## Dimensions

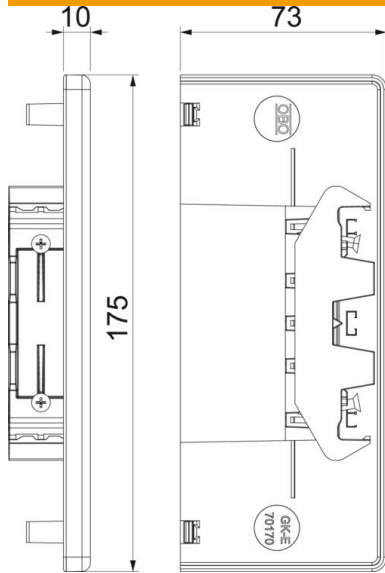

|        |        |
|--------|--------|
| Length | 29 mm  |
| Width  | 175 mm |
| Height | 73 mm  |

## Technical data

|                                      |             |
|--------------------------------------|-------------|
| Version for                          | Symmetrical |
| Fastening type                       | Screw-on    |
| for duct width                       | 170 mm      |
| for trunking height                  | 70 mm       |
| Suitable for                         | Left/right  |
| Halogen-free                         | no          |
| Cut lamination                       | yes         |
| Protection rating                    | IP30        |
| Protective film                      | yes         |
| Protection rating IK code            | IK08        |
| Permitted temperature range,<br>max. | 60 °C       |
| Permitted temperature range,<br>min. | -15 °C      |