


Technical data sheet

PYROMIX® dry mortar in paper sack

Item number: 7206104

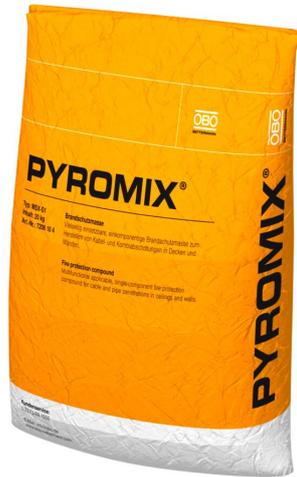

Mortar to create cable and combination insulation in solid walls and ceilings. Suitable for pumping, pressing and for manual installation. Adding approx. 6 litres of water to 20 kg of dry mortar produces about 20 litres of workable compound. For interior application.

In dry, frost-free rooms, the dry mortar can be stored for at least 12 months in closed original containers.



Special mortar

Master data

| | |
|---------------------|----------------------------|
| Item number | 7206104 |
| Description 1 | Fire protection mortar |
| Description 2 | for combination insulation |
| Manufacturer | OBO |
| Dimension | 20kg |
| Colour | Grey |
| Material | Special mortar |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 2000 kg |
| Weight unit | kg/100 pc. |

Technical data

| | |
|-------------------------|-------------------|
| Fire protection version | Mortar insulation |
| Shape | Miscellaneous |
| Contents | 20 kg |
| Accessories required | no |