


# Technical data sheet

## Pressure clip for 10 cables

Item no. 2204991

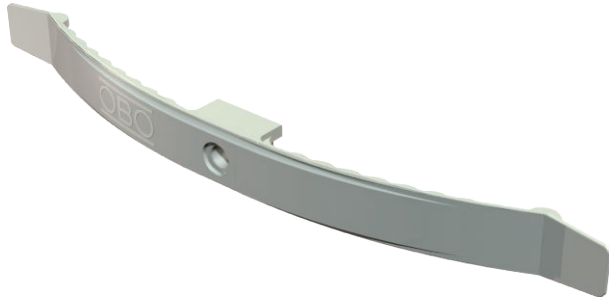

Standard version for general use, e.g. on intermediate ceilings and partition walls.  
Clamping height 9 mm – with spacer 13 mm.  
Fastening hole: 6 mm Ø.




**PA** Polyamide

Additional product text, instruction	Stone grey version: flame-resistant version, specially for use in suspended ceilings. Thermoplastic Polyester, stone grey RAL 7030, flame-resistant to VDE 0471/DIN IEC 695 Part 2-1, test temperature 960 °C, respectively V-0 to UL 94, halogen-free. Clamping height 9 mm – with spacer 13 mm. Fastening hole: 6 mm Ø.
Additional product text 1	2034 for max. 10 cables NYM 3 x 1.5 mm <sup>2</sup>

### Master data

Item no.	2204991
Type	2034 SP
Description 1	Pressure clip
Description 2	large packaging
Dimension	2x5 NYM3x1,5
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	100 Piece
Weight	1,17 kg/100 pc.

### Technical data

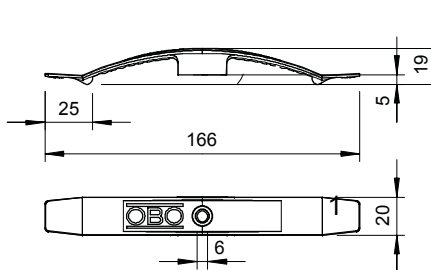

No. of conductors NYM 3 x 1.5	10
Flame-resistant version	<input type="checkbox"/>
Suitable for maintaining electrical function	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
With anchor	<input type="checkbox"/>